AUTODOC CLUB

How to change pollen filter on **Mercedes W169** – replacement guide

VIDEO TUTORIAL




Important!

This replacement procedure can be used for:
MERCEDES-BENZ A-Class (W169) E-CELL (169.090), MERCEDES-BENZ A-Class (W169) A 200 CDI (169.308, 169.008), MERCEDES-BENZ A-Class (W169) A 170 (169.032, 169.332), MERCEDES-BENZ A-Class (W169) A 200 (169.033, 169.333), MERCEDES-BENZ A-Class (W169) A 160 CDI (169.006, 169.306), MERCEDES-BENZ A-Class (W169) A 180 CDI (169.007, 169.307), MERCEDES-BENZ A-Class (W169) A 200 CDI (169.008, 169.308), MERCEDES-BENZ B-Class (W245) B 180 CDI (245.207), MERCEDES-BENZ B-Class (W245) B 200 CDI (245.208), MERCEDES-BENZ B-Class (W245) B 170 (245.232), MERCEDES-BENZ B-Class (W245) B 200 (245.233), MERCEDES-BENZ B-Class (W245) B 200 TURBO (245.234), MERCEDES-BENZ B-Class (W245) B 150 (245.231), MERCEDES-BENZ A-Class (W169) A 200 TURBO (169.034, 169.334), MERCEDES-BENZ B-Class (W245) B 170 NGT (245.233), (+ 5)

The steps may slightly vary depending on the car design.

REPLACEMENT: POLLEN FILTER – MERCEDES W169. TOOLS YOU MIGHT NEED:

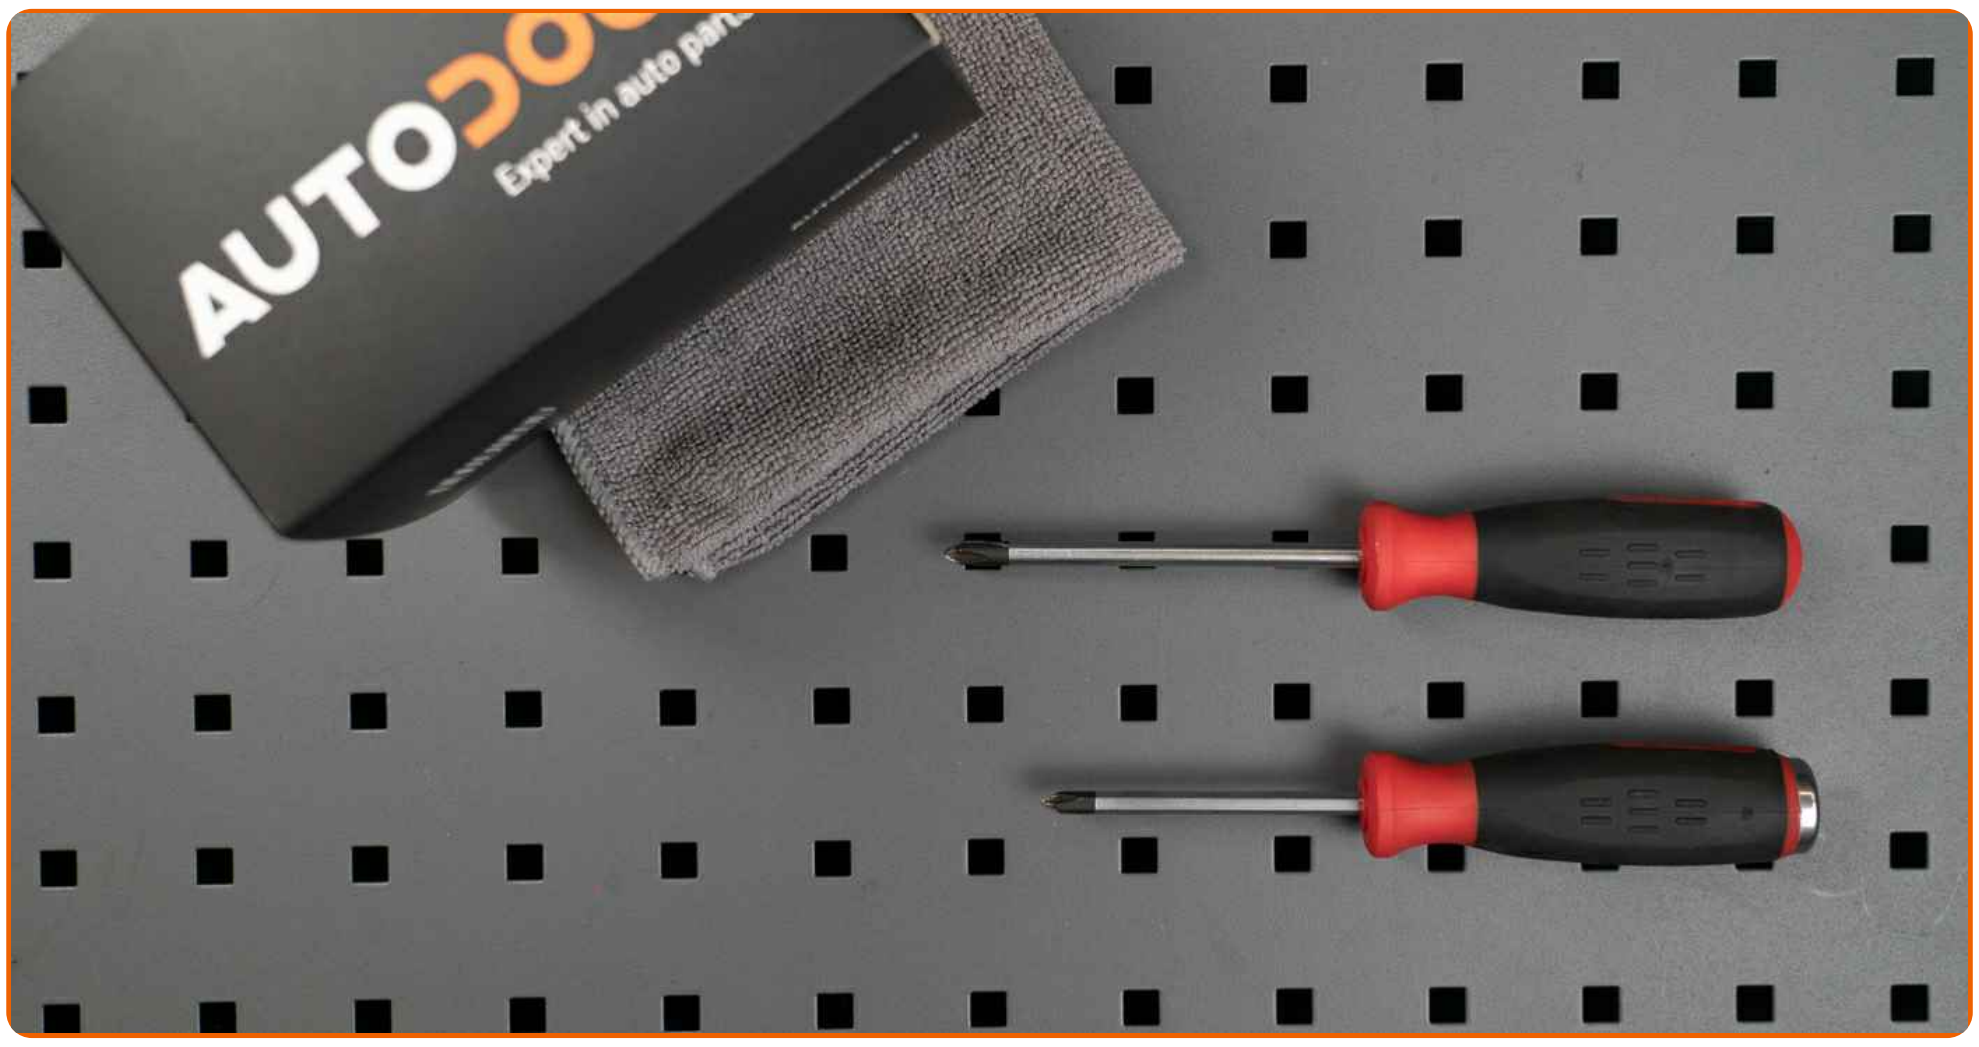

- Flat Screwdriver
- Fender cover


BUY TOOLS

Replacement: pollen filter – Mercedes W169. Tip from AUTODOC experts:

- Replace the cabin filter at least once every six months, in early spring and autumn seasons.
- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- If the air flow into the cabin has sharply reduced, replace the filter before a scheduled maintenance.
- Warning! Shut down the engine before starting any work – Mercedes W169.

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

1 Open the bonnet.

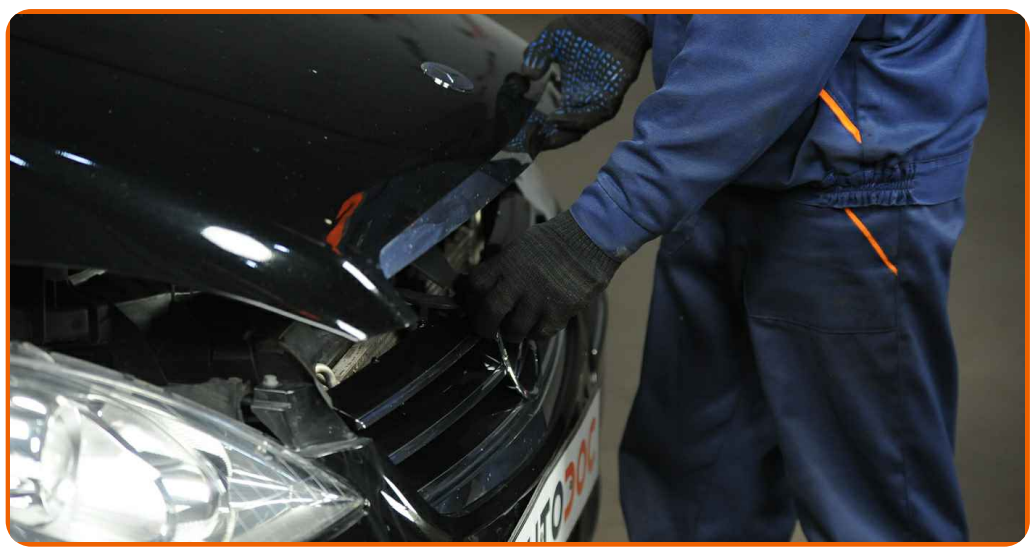

2 Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

3 Press the retainers.



4 Remove the cabin filter housing cover.



5 Remove the filter element from the filter housing. Use a flat screwdriver.



Replacement: pollen filter – Mercedes W169. AUTODOC recommends:

- Do not attempt to clean and reuse the filter - it will affect the quality of air cleaning inside the car.

6 Insert a new filter element into the filter housing. Make sure that the filter edge fits tight to the housing.



AUTODOC recommends:

- Replacement: pollen filter – Mercedes W169. Be sure to position the filtering element correctly. Avoid misalignment.
- Follow the air flow direction arrow on the filter.
- Take care to only use quality filters.

7 Reinstall the cabin filter housing cover. Make sure you hear a click indicating that it is locked in place.



8 Remove the fender protection cover. Close the hood.



9 Switch on the ignition.



10 Switch on the air conditioning system. This is necessary in order to make sure that the component operates properly.


11 Switch off the ignition.

WELL DONE!

VIEW MORE TUTORIALS

AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING

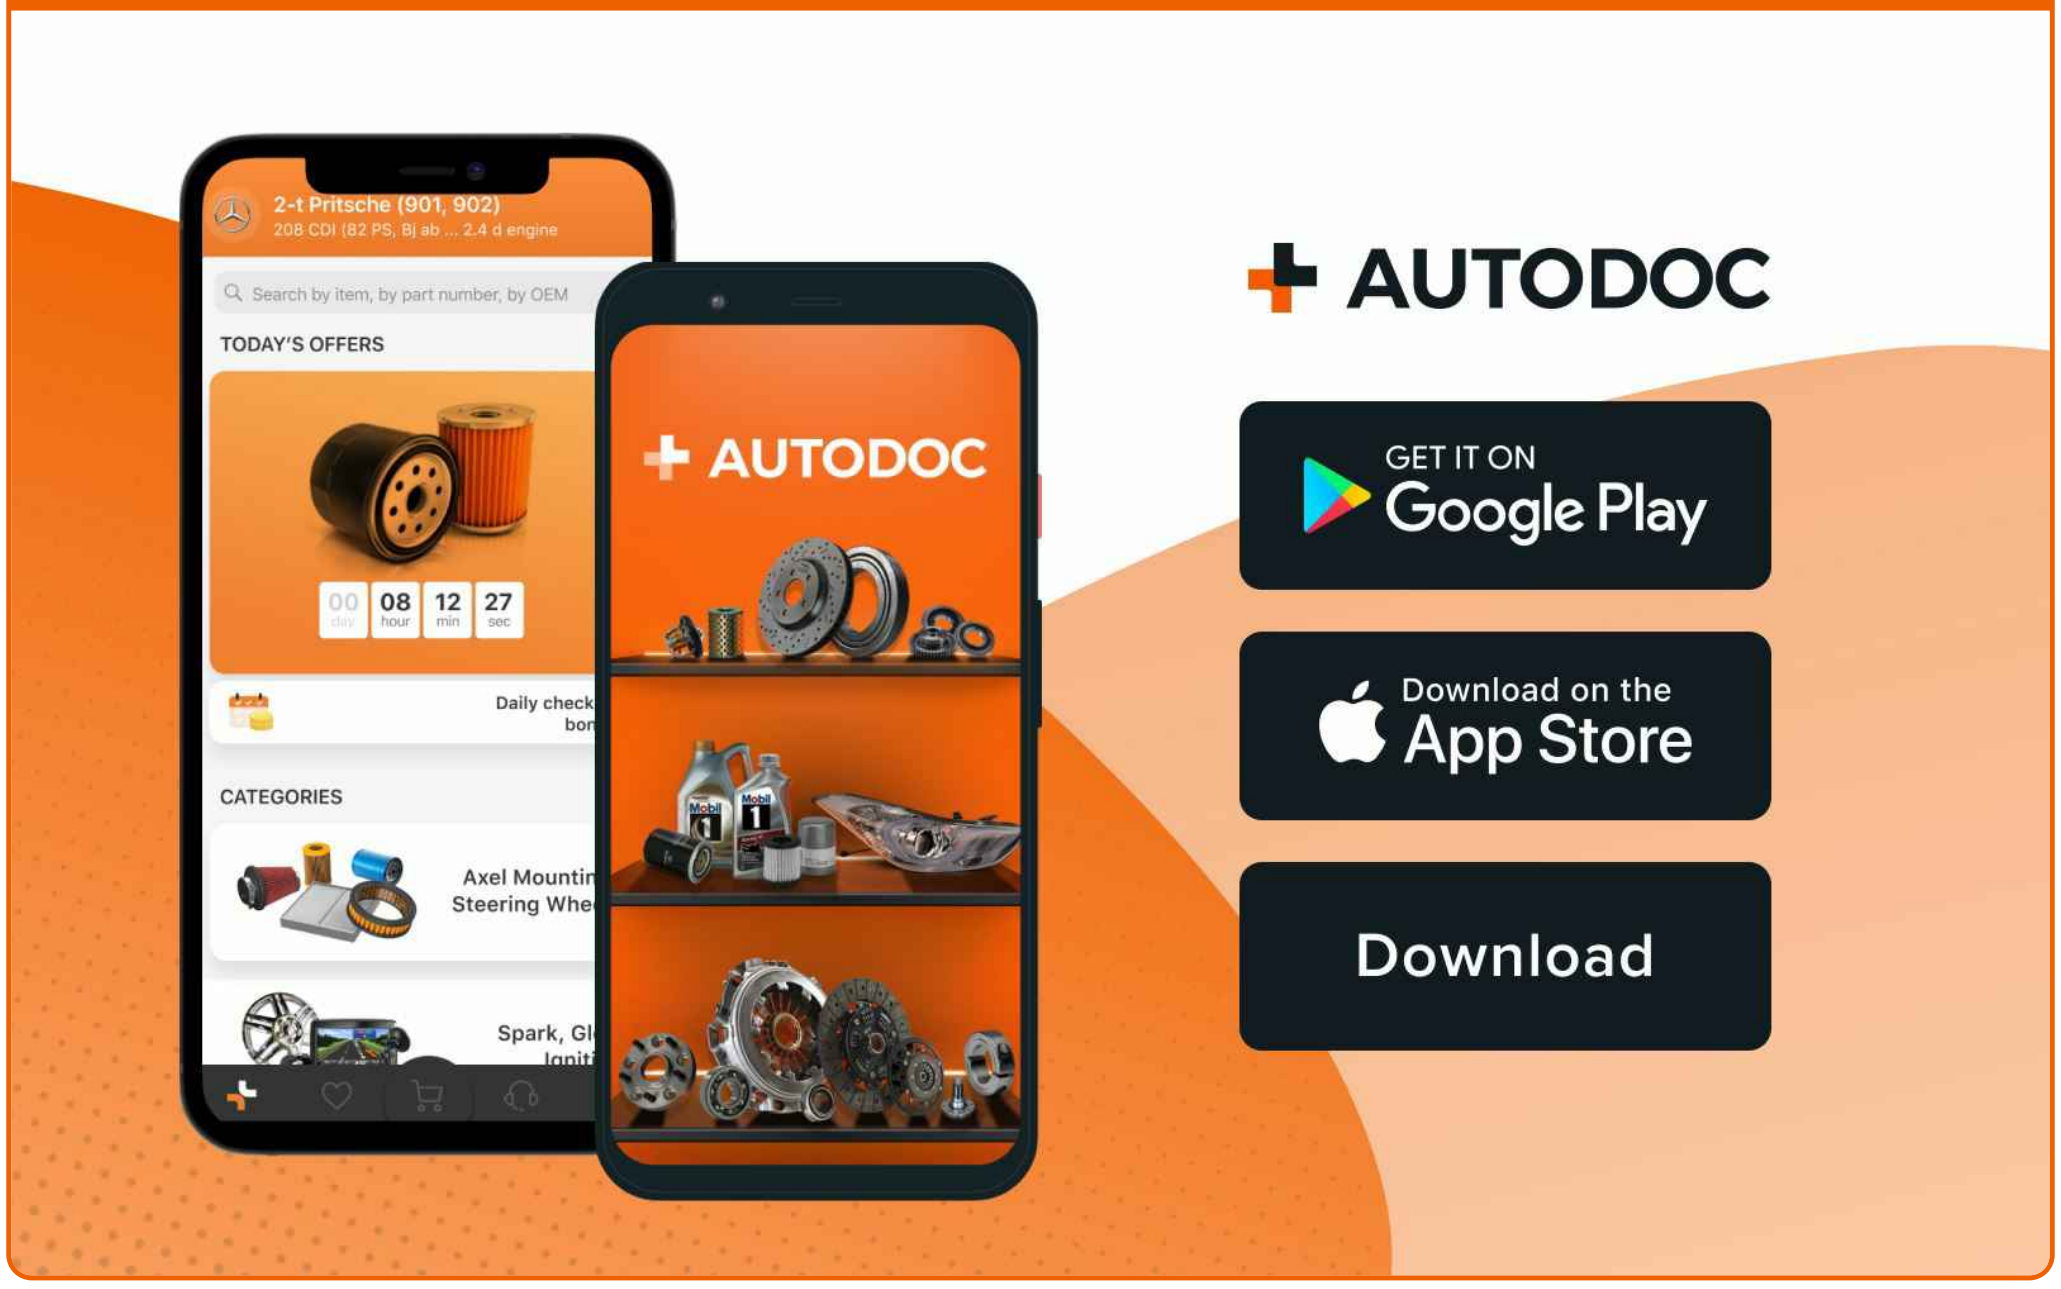

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR MERCEDES

POLLEN FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR MERCEDES W169

POLLEN FILTER FOR MERCEDES: BUY NOW

POLLEN FILTER FOR MERCEDES W169: THE BEST DEALS & OFFERS

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.